10 g

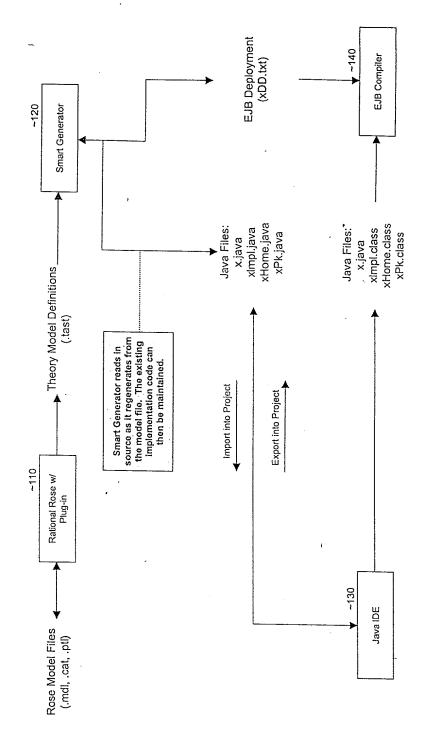


Fig. 1

| rectories Packages | | |
|------------------------|-------------------------|--------|
| Project Name : | | |
| bbtour | | |
| EJB Code Generation Or | itput Directory: | |
| D:\optiWebLogicAC\src | | Browse |
| Deploy Code Generation | Output Directory: | |
| D.loptWebLogicACidep | loy/weblogic/cloudscape | Browse |
| TAST Model File: | | |
| D.loptWebLogicAC\src\ | bbtour.tast | Browse |
| Save Project To: | | |
| D.lopfiWebLogicAClsrci | bbtour | Browse |
| | | |

| Project Properties | | | | | | 2 |
|------------------------|---------|----------|-------------|--------------|--|-------------------|
| Directories Packages | | | | | | andre. Telepap |
| Packages | | | | Classes | | |
| java.secumy.acı | | | ☑ BeanieHat | | | |
| Java.security.interfac | es | | ≥ BeanieHat | Drice Policu | | |
| java.rmi | | | | | | 9 |
| ☐ java.rmi.registry | | | | | | |
| java.rmi.server | | | | | | |
| ☐ java.rml.dgc | | | | | | 摄 |
| ☐ java.beans | | | | | | |
| ्र 🗆 examples | | | | | | |
| axamples.buybeans | | 2 | | | | |
| examples.buybeans. | item | | | | | |
| 🖸 examples buybeans | louic - | 4 | | | | |
| | | | 1 | | | |
| 14.7 | | | | | THE STATE OF THE S | |
| | ок | | Cance | 1 | | |

Fig. 3

| User Options | |
|---|--|
| Smart Generator Java | |
| Smart Generator Options | ruka erenegyu esti. Martika enteneg |
| Smart Generator | |
| theory.smart.compiler.SmartGener | ator |
| Smart Generator Options | |
| -trace g | |
| Smart Generator TAST Flag | |
| -tast | |
| Smart Generator Root Directory F | ag |
| -root | |
| Smart Generator Deploy Root Dire | ctory Flag |
| | |
| -deployment_root | |
| -deployment_root Smart Generator Classes Flag | |
| | |
| Smart Generator Classes Flag | |
| Smart Generator Classes Flag | |
| Smart Generator Classes Flag | |


Fig. 4

| Java Options Classpath C:UDK12~1.2\ire\lib\rt.jar,C.\tweblogic\eva\cloud Java Compiler javac Java Compiler Options | User Options | |
|---|-----------------------------|-------------------------------------|
| Classpath C:UDK12~1.2\(\text{ire}\)\(\text{lib\rt.jar,C.\}\)\(\text{tweblogic\}\)\(\text{eval\}\(\text{cloud}\)\(\text{Java Compiler}\)\(\text{java Compiler Options}\)\(\text{Java Virtual Machine}\)\(\text{java}\)\(\text{Java Options}\)\(\text{Java Execution Timeout}\) | mart Generator Java | |
| javac Java Compiler Options Java Virtual Machine java JMM Options Java Execution Timeout | Java Options — —— | ک در بیان کی گریست پیشین پرسیان دید |
| Java Compiler javac Java Compiler Options Java Virtual Machine java JVM Options Java Execution Timeout | Classpath | |
| javac Java Compiler Options Java Virtual Machine java JMM Options Java Execution Timeout | C:UDK12~1.2\ire\lib\rt.jar; | C.tweblogiclevallcloud |
| Java Compiler Options Java Virtual Machine java JVM Options Java Execution Timeout | Java Compiler | |
| Java Virtual Machine java JVM Options Java Execution Timeout | javac | |
| java JMM Options Java Execution Timeout | Java Compiler Options | a a few feb |
| java JMM Options Java Execution Timeout | | |
| JVM Options Java Execution Timeout | Java Virtual Machine | |
| Java Execution Timeout | java | |
| | JVM Options | |
| | | |
| 10000 | Java Execution Timeout | |
| | 10000 | |
| | | |
| | | |
| | | |
| | | - 114 |
| | Ok | Cancel |

Fig. 5

| rojects Output Console | 하는 이 회사 기계 시간 시간 기계 전략 1885년 - 1985년 - | |
|---|--|------------------------------|
| C:/WebLogicAC/src/examples/buybeans/t/ Mon Apr 03 19:07:00 EDT 2000:cp Creat C:/WebLogicAC/src/examples/buybeans/tc Mon Apr 03 19:07:00 EDT 2000:cp Genet C:/WebLogicAC/src/examples/buybeans/tc Mon Apr 03 19:07:01 EDT 2000:cp Creat C:/WebLogicAC/src/examples/buybeans/tc Mon Apr 03 19:07:01 EDT 2000:cp Genet C:/WebLogicAC/src/examples/buybeans/tc Mon Apr 03 19:07:01 EDT 2000:cp Genet C:/WebLogicAC/src/examples/buybeans/tc Mon Apr 03 19:07:01 EDT 2000:cp Genet C:/WebLogicAC/deploy/weblogic/cloudse ticePolicyTcBnp.java Mon Apr 03 19:07:01 EDT 2000:cp Comp | ted backup file to> bur/BeanieHatPridePolicy.jau cating Implementation bur/BeanieHatPridePolicyImpl ted backup file to> bur/BeanieHatPridePolicyImpl cating Hone bur/BeanieHatPridePolicyHone ted backup file to> bur/BeanieHatPridePolicyHone ted backup file to> bur/BeanieHatPridePolicyHone ted backup file to> bur/BeanieHatPridePolicyHone teating Data Object JDBC ape/examples/buybeans/tour/E | ra.bak .java .java.bak .java |
| Step Clear | | |

Fig. 6

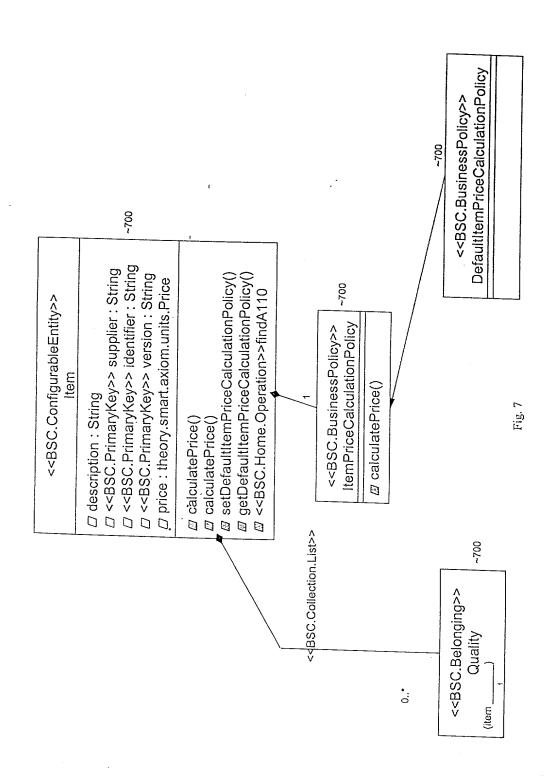

| Name and Stereotype | < <bsc.configurableentity>></bsc.configurableentity> | ~810 |
|---------------------|---|--------------|
| | item. | |
| | // description : String • // description : String • // < <bsc primarykey="">> supplier String</bsc> | ~820 |
| | // << BSC. PrimaryKey>> identifier: String | - Attributes |
| 700 <i>T</i> | <pre>// < // SebsC.PrimaryKey>> version : String</pre> // price : theory.smart.axiom.units.Price | |
| | ☑ calculatePrice() | -830 |
| | □ calculatePrice() □ □ □ □ | - Methods |
| | ☑ setDefaultItemPriceCalculationPolicy()☑ getDefaultItemPriceCalculationPolicy() | |
| | | |

Fig. 8

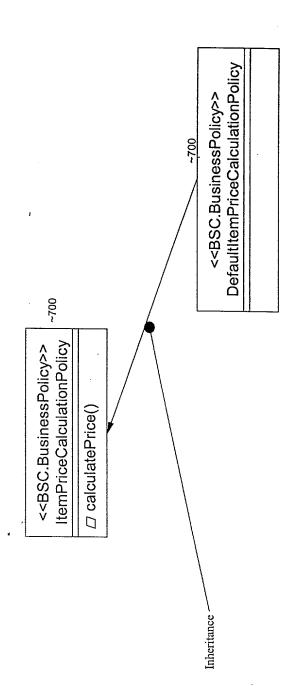


Fig. 9

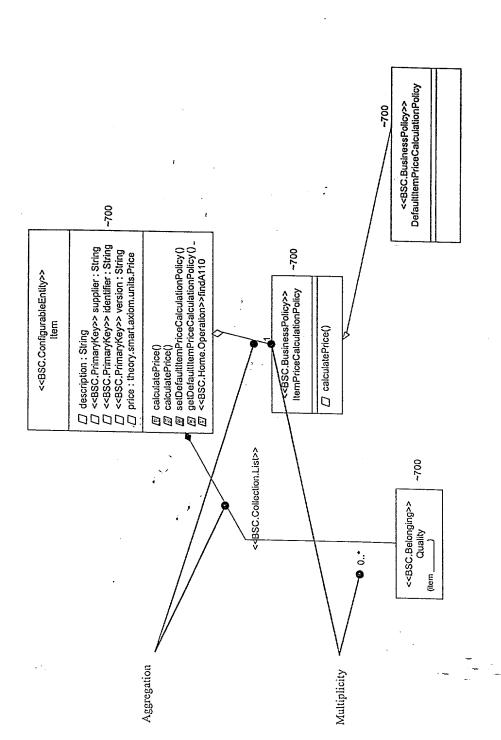


Fig. 10

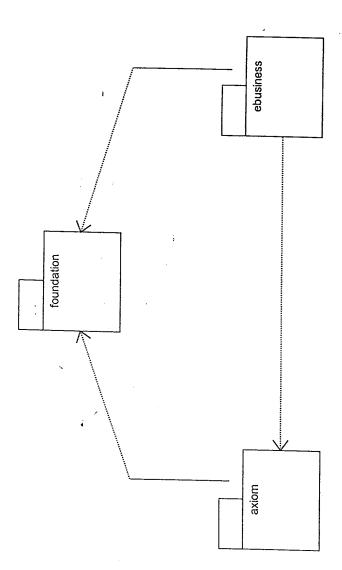


Fig. 11

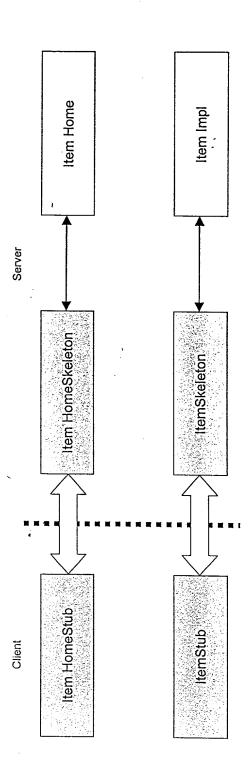


Fig. 12

| BeanieToy | |
|-----------|--|
| | |
| | |
| | |
| | |

Fig. 13

| Huma | nBean | | |
|---------------|-------|---|---------------|
| oname: String | | | BeanieToy |
| Them's Camp | | | oname: String |
| | | 0 | 6 B |
| | .,, | | |

Fig. 14

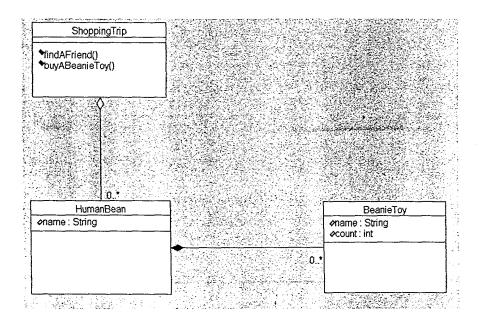


Fig. 15

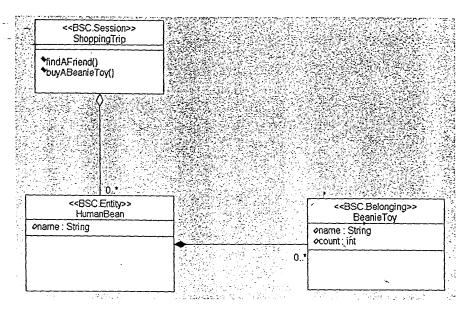


Fig. 16

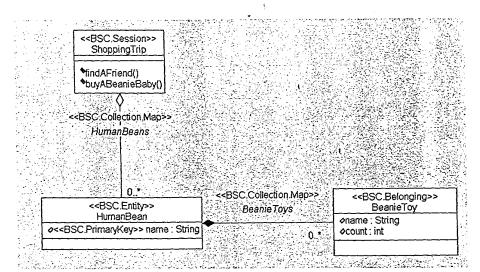


Fig. 17